

KOMO[®] Product certificate **K94620/01**



Issued 2019-02-01 Replaces

Valid until indefinite D.d. --

Page 1 of 2

Steel for the reinforcement of concrete B500B: bars **EKINCILER DEMIR ve ÇELİK SAN. A.Ş.**

STATEMENT BY KIWA

This product certificate is issued on the basis of BRL 0501 "Steel for the reinforcement of concrete" (Betonstaal)" issued on 1 September 2010, in accordance with the Kiwa-Regulations for Certification.

The quality system and product characteristics in association with Steel for the reinforcement of concrete are assessed periodically.

On this basis Kiwa declares that a justified confidence exists, that the Steel for the reinforcement of concrete delivered by the certificate holder at delivery fulfill:

- the technical specification laid down in this product certificate,
- the product requirements as laid down in this product certificate and in the BRL. provided that Steel for the reinforcement of concrete has been marked with the KOMO®-mark in a manner as indicated in this product certificate.

Ronald Karel Kiwa

This product certificate is listed in the overview on the website of Stichting KOMO: www.komo.nl. Advise: consult www.kiwa.nl to determine whether this product certificate is valid.

Kiwa Nederland B.V.
Sir Winston Churchilllaan 273
Postbus 70
2280 AB RIJSWIJK
Tel. 088 998 44 00
Fax 088 998 44 20
info@kiwa.nl
www.kiwa.nl

Certificate holder EKİNCİLER DEMİR ve ÇELİK SAN. A.Ş. Organize Sanayi Bolgesi P.K. 240 31200 İskenderun - Hatay – Türkiye Tel. +90 (326) 656 22 00 (251-258) Fax +90(326) 656 22 23



Evaluated is:
 quality system
 product
Periodic inspection

Steel for the reinforcement of concrete B500B (bars)

TECHNICAL SPECIFICATION

Subject

Steel for the reinforcement of concrete B500B (bars)

The products are in accordance with the requirements of chapter 4 of guideline BRL 0501 and with that of NEN 6008. The products are meant to be used in constructions of concrete.

Product characteristics

Classification : B500B

Production method: Hot rolled/water cooled

Nominal size : 8 – 10 – 12 – 14 – 16 – 20 – 25 – 28 and 32 mm

Delivery condition : bars

Marking

The products are marked with a label with upon it at least on a clear and indelible way:

- -- the KOMO®-logo and the certificate number, figure 1;
- -- the classification B500B;
- -- the diameter:
- -- the rolling mark;
- -- heatnumber/castnumber/coilnumber;
- -- name of the certificate holder;
- -- BRL 0501.

Place of the label: at least one label per bundle of bars.


Steel for the reinforcement of concrete is marked on the following way:

On one rib row by thicken ribs, with the code (9-19), figure 2.

Place of the mark: on a mutual distance of ± 1 meter. The position of the transverse ribs may also be in reverse.



Figure 1

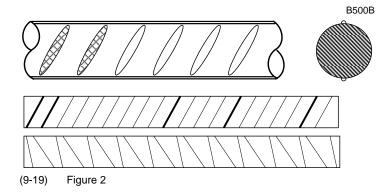

RECOMMENDATIONS FOR CUSTOMERS

Check at the time of delivery whether:

- the supplier has delivered in accordance with the agreement;
- the mark and the marking method are correct;
- the products show no visible defects as a result of transport etc.

If you should reject a product on the basis of the above, please contact:

EKINCILER DEMIR ÇELİK SAN. A.Ş.

and, if necessary,

- Kiwa Nederland B.V.

Consult for the proper storage, transport and processing NEN-EN 13670.

LIST OF DOCUMENTS

NEN 6008 : Betonstaal

NEN-EN 13670 : Het vervaardigen van betonconstructies



^{*} For the actual version of the standards see the latest version of the BRL 0501 or latest amendment sheet.